


移動体通信基地局用アンテナ

EyeOnTenna (カメラ機能付きアンテナ)

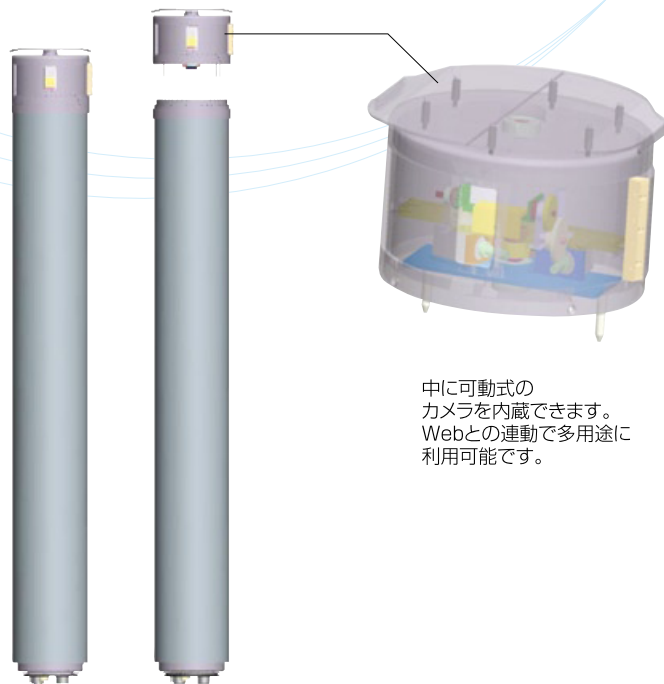

中に可動式のカメラを内蔵できます。Webとの連動で多用途に利用可能です。

Codec	H.264	D1 max 60fps
	JPEG	D1 max 30fps
PLC	Modulation	FSK based DMT
	Frequency	2~24MHz
Processor	ARM9(210MHz)in SoC	
Motor	Micro Stepping Motor(1/8)	
OS	Embedded Linux Kernal 2.6	
USB	2.0 Host	
Ethernet	10/100 Base-T	
OSD	256 character,16color,bmp	
CCD	1.3 M pixel(option)	
CMOS	4 M pixel(option)	
Wireless LAN	IEEE 802.11(Optional)	
WiMAX	IEEE 802.16(Optional)	
Video In	NTSC/PAL	
PAN Range	-60°~+60°	
Tilt Range	-15°~+5°	
View Angle	Horizontal 85°(Vertical 64°)	
Operating Temperature	-25°~+85°	

Voltage	3.3VDC, 1.8VDC	
Current	Max	2.5A
	Min	1.2A
Power	Max 30W	
PLC Frequency	2~24 MHz	
Pan Motor Holding Torque	600 g-cm	
TILT Motor Holding Torque	400 g-cm	

株式会社 ケイエムダブリュジャパン

横浜市港北区新横浜3丁目18番5号 アイズビル7階
Tel:045-478-2202 Fax:045-478-2210
<http://www.kmwinc.co.jp>

KMW Inc.

65 Youngchun-ri, Dongtan-myun, Hwasung-si,
Kyungki-do, Republic of Korea, 445-813
Tel: +82-31-370-8661 Fax: +82-31-376-2897
<http://www.kmwinc.com>

KMW Japan Inc.